cimber stacks®



clomber stocks®

From the creator of the original Clamber Stacks®.

The Clamber Stacks® range are designed and manufactured in the UK from sustainably sourced timber.

Since their initial introduction in 2010, the Clamber Stacks® have undergone extensive design and development work to create the trusted Clamber Stacks® brand.

The ability to offer unrivalled value for money whilst still ensuring exceptional quality and longevity is key. The Clamber Stacks® range accommodates all ages, budgets and play scheme sizes. Our uncompromising approach to safety during the design and manufacturing process is paramount. With this in mind the entire Clamber Stacks® range has been independently tested to ensure it is fully compliant with the demanding standards of BS EN 1176.

In order to ensure the highest level of accuracy, all units are produced on a custom made, state of the art, 6 Axis CNC machine. This technology allows us to offer unparalleled accuracy in the field of play timber production.



- 10 year in-ground guarantee.
- Sustainably sourced softwood.
- Pressure treated using the latest generation wood preservative.
- Ideally suited for climates similar to the UK.



- 15 year in-ground guarantee.
- Produced from sustainably sourced Radiata Pine.
- Outstanding treatment properties, which allow the latest generation wood preservative to penetrate the entire timber during pressure treatment.
- Suitable for most climates including hot or wet environments.



- 20 year guarantee.
- Sustainably sourced softwood paired with steel feet to offer a premium product.
- Pressure treated using the latest generation wood preservative.
- The manufacturing process involved reduces the naturally occurring stress in the timber to give an increased resilience against cracking, even when exposed to longer periods of direct sunlight and consistent high temperatures.
- Not suitable for in-ground contact and must be supplied with steel feet.
- Ideal for hot climates.





Steel Feet



Wrap Around

Galvanised steel feet offer an alternative to 'in-ground' timbers and can be used in both wet pour surfacing or extended to accommodate loose fill bark. The feet are securely fixed to the timbers prior to dispatch with all fixings concealed.

The Clamber Stacks® range utilises a 2 part wrap around steel foot.

Wrap around steel feet are an optional extra for the following Clamber Stacks and can be added for a small additional charge. Piccolo, all Midi's, Sorella, 1, 2, 3, 3 with slide, 4, 5, 5 with slide, Fratello, Mezzo and Passo.

Wrap around steel feet are fitted as standard on the Clamber Stack Figlio, Zio, Zio with slide, Zietta, Zietta with slide, Madrina, Madrina with slide, Padrino and Padrino with slide regardless of timber type.

Timber Treatment

The ability to offer extensive warranties is in part down to the meticulous treatment process each timber goes through. All timbers are kiln dried at a low temperature to the optimum moisture content. This slow drying process minimises the chances of the timber cracking and ensures the maximum treatment penetration.

The timbers are then pressure treated using the UK's leading wood preservative. This advanced protection offers a comprehensive and proven barrier against the threat of wood decay and insect attack for in ground contact timbers. Once treated, the timbers do not require further coating to ensure they out perform their warranty period.

Warranty

As timber is a natural product it will inevitably react to the conditions it is faced with in an open environment. In the instance of cracking, the timber reacts to the moisture content in the air. During dry spells, cracks may appear which then close up in prolonged periods of wet weather. Any cracks that do appear shall only be deemed to require attention once they exceed 8mm in width.

The treatment will naturally fade from the initial green to a light brown then a silver grey over time. This, along with the weathering process, does not indicate any loss of preservative protection.

Full warranty and maintenance documents are available on request.






Clamber Stack Piccolo

with Ropes

Product Dimensions 2030mm (L) 1810mm (W) 1675mm (H) Minimum surface area: 19.2m² 5116mm (L) 4853mm (W) Free fall height: 599mm No impact attenuating surface required. Steel feet option available* Also available without ropes.

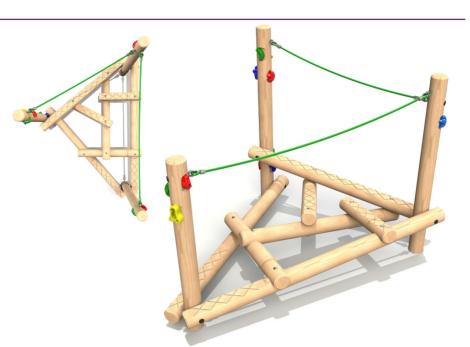



Steel feet

Galvanised steel feet can be fitted to the Piccolo, Midi, Midi with Deck, Midi with Slide and Sorella for a small additional charge.

Adding steel feet to these units will increase the free fall height by an additional 300mm

Clamber Stack Midi

Product Dimensions 2510mm (L) 2295mm (W) 1800mm (H) Minimum surface area: 23.1m² 6042mm (L) 5292mm (W) Free fall height: 900mm Steel feet option available* Bespoke rope colours available





Product Dimensions

3140mm (L) 2510mm (W) 1800mm (H) Minimum surface area: 27.4m² 6544mm (L) 6140mm (W) Free fall height: 900mm Steel feet option available* Bespoke rope colours available

Clamber Stack Midi with Plastic Slide

Product Dimensions

abcdefg

hijklmn opgrst

UVWXYZ

4417mm (L) 2720mm (W) 1800mm (H) Minimum surface area: 32.9m² 8164mm (L) 6651mm (W) Free fall height: 900mm Steel feet option available* Bespoke rope colours available

Clamber Stack Midi with Stainless Steel Slide

clomber stocks®


Product Dimensions

4547mm (L) 2792mm (W) 1800mm (H) Minimum surface area: 33.4m² 8195mm (L) 6617mm (W) Free fall height: 900mm Steel feet option available* Bespoke rope colours available



Product Dimensions


3620mm (L) 3200mm (W) 1750mm (H) Minimum surface area: 28.7m² 6619mm (L) 6203mm (W) Free fall height: 599mm No impact attenuating surface required. Steel feet option available* Also available without ropes.





Clamber Stack I


Product Dimensions 2462mm (L) 2808mm (W) 2550mm (H) Minimum surface area: 26.3m² 5741mm (L) 6401mm (W) Free fall height: 1500mm Steel feet option available Bespoke rope colours available

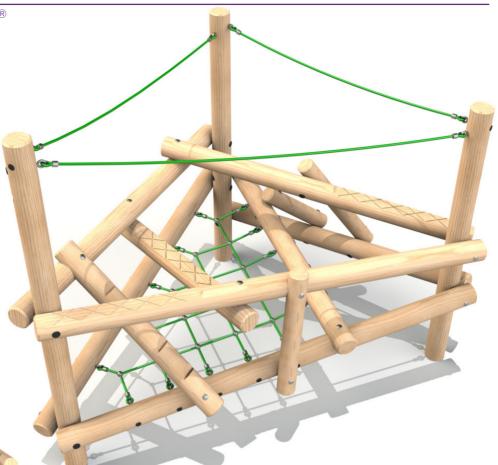




Steel feet

Galvanised steel feet can be fitted to the Clamber Stack 1, 2, Fratello and Mezzo for a small additional charge. Steel feet offer an alternative to in-ground timbers and can be used in both wet pour and extended for loose fill surfacing.

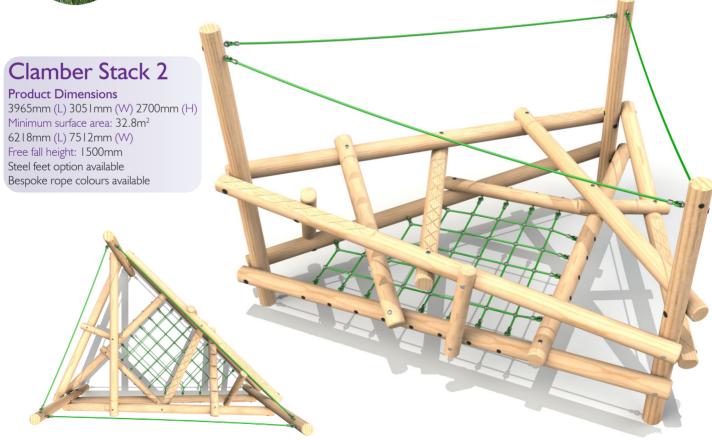

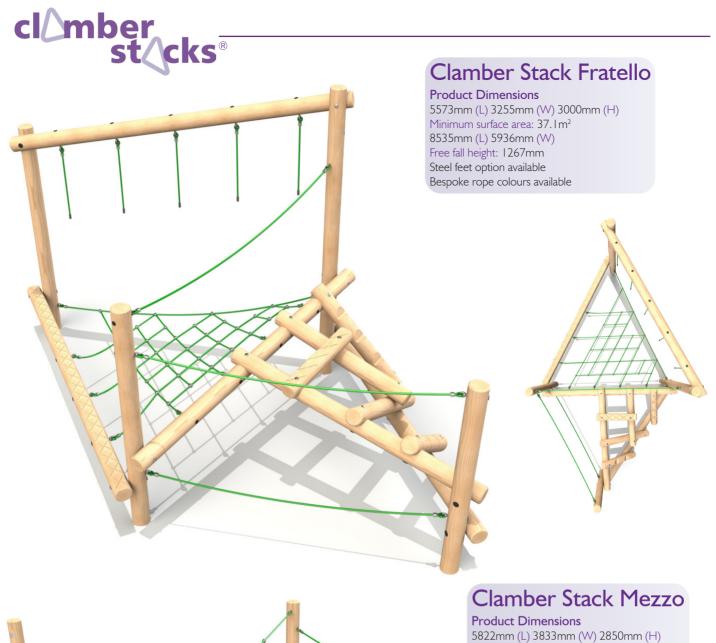

5822mm (L) 3833mm (W) 2850mm (H Minimum surface area: 42.1m² 8817mm (L) 6833mm (W) Free fall height: 1500mm Steel feet option available Bespoke rope colours available

clûmber stúcks®

Clamber Stack 3

Product Dimensions

5462mm (L) 3982mm (W) 2700mm (H) Minimum surface area: 42. Im² 8965mm (L) 7132mm (W) Free fall height: 1500mm Steel feet option available Bespoke rope colours available

Clamber Stack 3 with Stainless Steel Slide

Product Dimensions

6267mm (L) 5694mm (W) 2700mm (H) Minimum surface area: 54m² 9979mm (L) 9542mm (W) Free fall height: 1600mm Steel feet option available Bespoke rope colours available





Steel feet

Galvanised steel feet can be fitted to the Clamber Stack 3, 3 with Slide, Passo and 4 for a small additional charge. Steel feet offer an alternative to in-ground timbers and can be used in both wet pour and extended for loose fill surfacing.

Adding steel feet to the Clamber Stack 4 will increase the free fall height by an additional 200mm

Clamber Stack 4

Product Dimensions 6462mm (L) 3126mm (W) 2925mm (H) Minimum surface area: 44.8m² 10055mm (L) 6130mm (W) Free fall height: 1500mm Steel feet option available Adding steel feet increases the free fall height to 1700mm Bespoke rope and HDPE colours available

Bespoke rope and play panel colours available.





Steel feet

Galvanised steel feet can be fitted on all Clamber Stacks for a small additional charge. Steel feet offer an alternative to in-ground timbers and can be used in both wet pour and extended for loose fill surfacing.

Bespoke rope colours and play panel designs available.





Clamber Stack Zietta

clomber stocks

Product Dimensions 8627mm (L) 8233mm (W) 2700mm (H) Minimum surface area: 91.5m² 11881mm (L) 11548mm (W) Free fall height: 1550mm Steel feet as standard Bespoke rope colours available




Steel feet

Galvanised steel feet are fitted as standard on the Clamber Stack Figlio, Zio, Zio with slide, Zietta, Zietta with slide, Madrina, Madrina with slide, Padrino and Padrino with slide.

Clamber Stack Zietta with Stainless Steel Slide

Product Dimensions

I 1651mm (L) 9564mm (W) 2875mm (H) Minimum surface area: 103.5m² 15449mm (L) 13114mm (W) Free fall height: 1900mm Steel feet as standard Bespoke rope colours available





Clamber Stack Madrina

Product Dimensions 8628mm (L) 8304mm (W) 2835mm (H) Minimum surface area: 101.4m² 12021mm (L) 11581mm (W) Free fall height: 1870mm Steel feet as standard Bespoke rope colours available

Clamber Stack Madrina with Stainless Steel Slide

Product Dimensions 11651mm (L) 8304mm (W) 2875mm (H) Minimum surface area: 112.8m² 15560mm (L) 11594mm (W) Free fall height: 1900mm Steel feet as standard Bespoke rope colours available



Clamber Stack Padrino

Product Dimensions 9713mm (L) 8632mm (W) 2835mm (H) Minimum surface area: 120.4m² 13101mm (L) 11992mm (W) Free fall height: 1870mm Steel feet as standard Bespoke rope colours available



Steel feet

Galvanised steel feet are fitted as standard on the Clamber Stack Figlio, Zio, Zio with slide, Zietta, Zietta with slide, Madrina, Madrina with slide, Padrino and Padrino with slide.

Clamber Stack Padrino with Stainless Steel Slide


Product Dimensions

11610mm (L) 9710mm (W) 2875mm (H) Minimum surface area: 131.7m² 15560mm (L) 13041mm (W) Free fall height: 1900mm Steel feet as standard Bespoke rope colours available

clomber stocks

Steel feet

Galvanised steel feet are fitted as standard on the Clamber Stack Figlio, Zio, Zio with slide, Zietta, Zietta with slide, Madrina, Madrina with slide, Padrino and Padrino with slide.

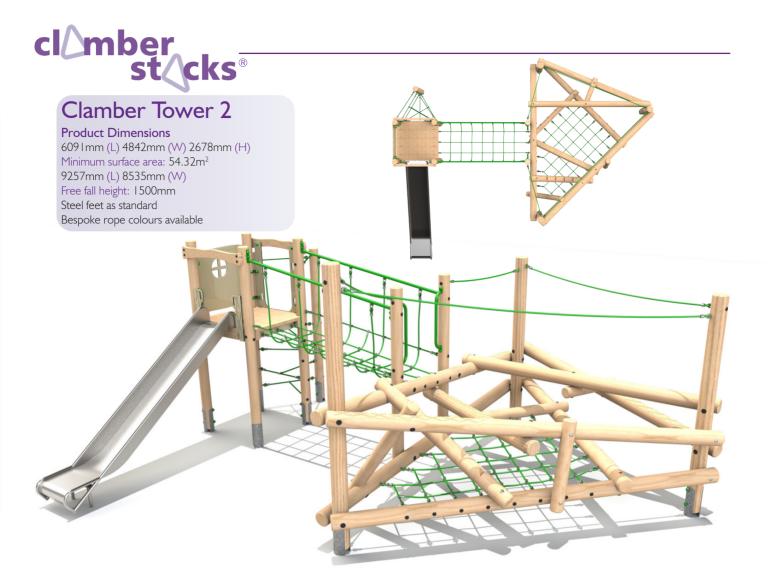

Clamber Tower 2 Castle

Product Dimensions 6636mm (L) 4842mm (W) 3535mm (H) Minimum surface area: 54.54m² 9802mm (L) 8535mm (W) Free fall height: 1500mm Steel feet as standard Bespoke rope colours available



Download our Timber Towers brochure online at www.aeevans.co.uk/brochures.




Steel feet

Galvanised steel feet are fitted as standard on the Clamber Tower 2, Mezzo, 3, 2 Castle, 3 Double Deck Castle and 3 Triple Deck Castle.


Clamber Tower 3 Double Deck Castle

Product Dimensions 9484mm (L) 5543mm (W) 3740mm (H) Minimum surface area: 78.91m² 13081mm (L) 8467mm (W) Free fall height: 1500mm Steel feet as standard Bespoke rope colours available

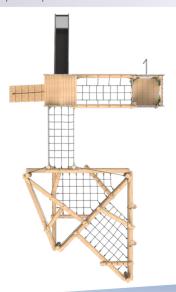



Bespoke rope colours available.

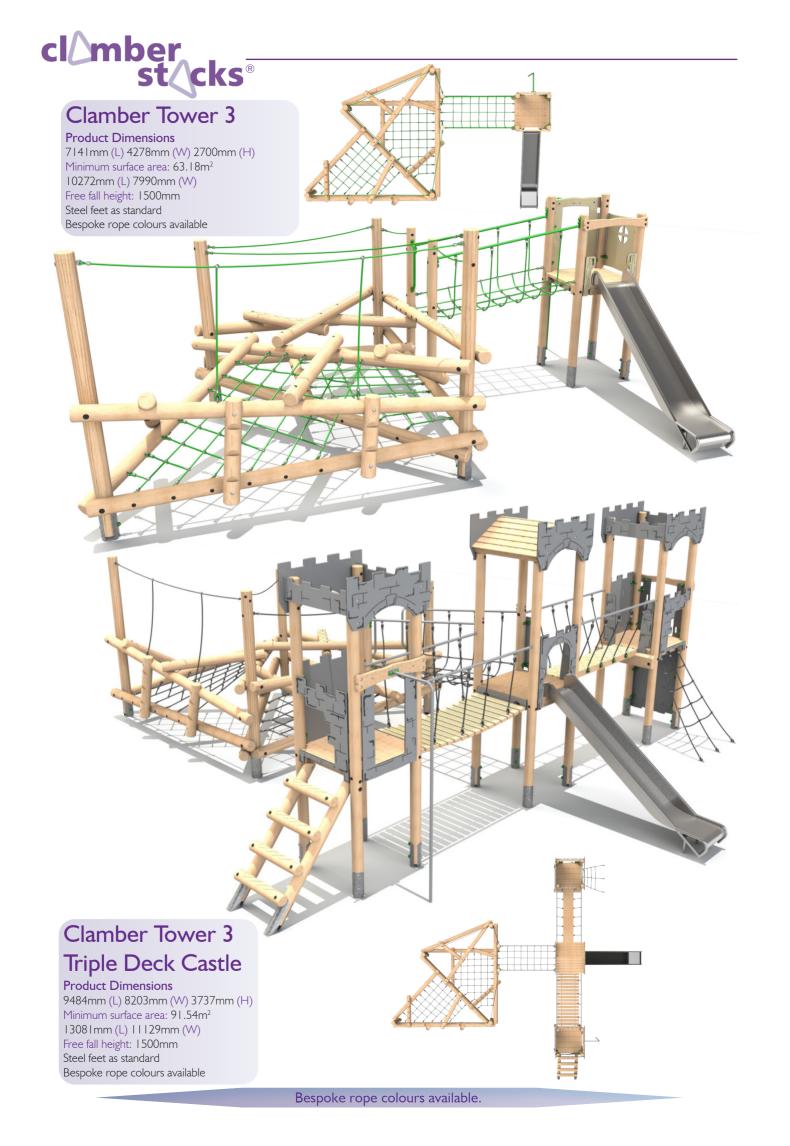



The ability to offer unrivalled value for money whilst still ensuring exceptional quality and longevity is key. The Clamber Stacks® range accommodates all ages, budgets and play scheme sizes. Our uncompromising approach to safety during the design and manufacturing process is paramount.

With this in mind all the Clamber Stacks® items have been independently certified by the Play Inspection Company to meet the demands BS EN 1176. In order to ensure the highest level of accuracy, all units are produced on a custom made, state of the art, 6 Axis CNC machine. This technology allows us to offer unparalleled accuracy in the field of play timber production.

Tel: 01536 601950 / 07539629573 rpm@reidsplayground.co.uk www.reidsplaygroundmaintenance.co.uk Reids Playground Maintenance Ltd, The Stone Yard, Furnace Ln, Finedon, Wellingborough NN9 5NY